
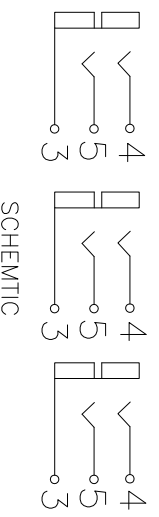


- NOTES:
- ELECTRICAL:
- 1: RATED CURRENT: 0.2A Max.
  - 2: RATED VOLTAGE: 50V AC.
  - 3: CONTACT RESISTANCE: 30 MILLIOHMS Max. AFTER TESTING: 100 MILLIOHMS Max.
  - 4: INSULATION RESISTANCE: 100 MEGAOHMS Min.
  - 5: DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
- MECHANICAL:
- 1: INSERTION FORCE: 3N-30N.
  - 2: WITHDRAWAL FORCE: 3N-30N.
  - 3: DURABILITY: 100 CYCLES.
- ENVIRONMENTAL:
- TEMPERATURE RANGE: -20°C TO 60°C.

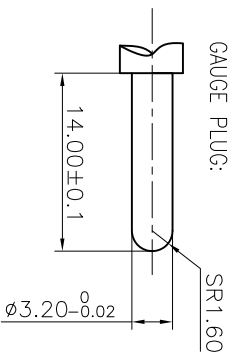

|   |      |                     |  |
|---|------|---------------------|--|
| ANGLE   | ±5°  | MODEL NAME: RCA-606 | <br>广东正宝科技有限公司<br>GUANGDONG TRENPRO TECHNOLOGY CO., LTD. |
| 63 < L  | ±0.5 | (PART NO.)          |  |
| 16 < L ≤ 63   | ±0.4 | DESIGN: Z.F.Lion    | TITLE: RCA PIN JACK                                      |
| 4 < L ≤ 16  | ±0.3 | CHECKED: L.W.Wu     | DWG NO.:   |
| L ≤ 4   | ±0.2 | See table           | UNIT: mm   |
| TOL TABLE:  |      | Q'TY./              | APPROVED: X.Q.Hu   |
| THIS DOCUMENT IS THE PROPERTY OF TRENPRO TECHNOLOGY CO., LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER |      | FINISH: See table   | DATE: 11/29/18   |
|   |      | VIEW: 5:1           | SCALE: SHEET: 1/1  |
|   |      | SIZE: A3            | REV.: A  |

|       |          |               |          |
|-------|----------|---------------|----------|
| REV.: | ECN NO.: | MODIFIED MARK | APPROVED |
| A     |          | FIRST RELEASE |          |