

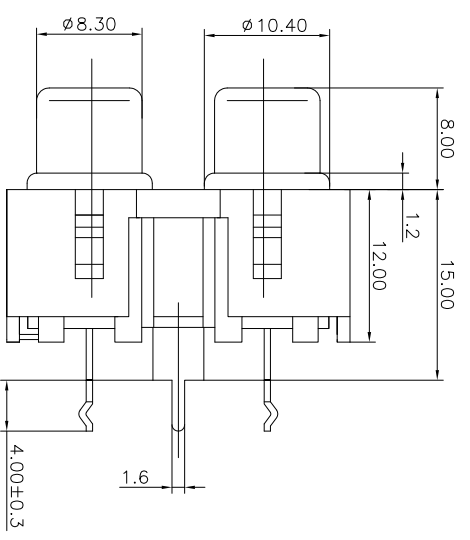
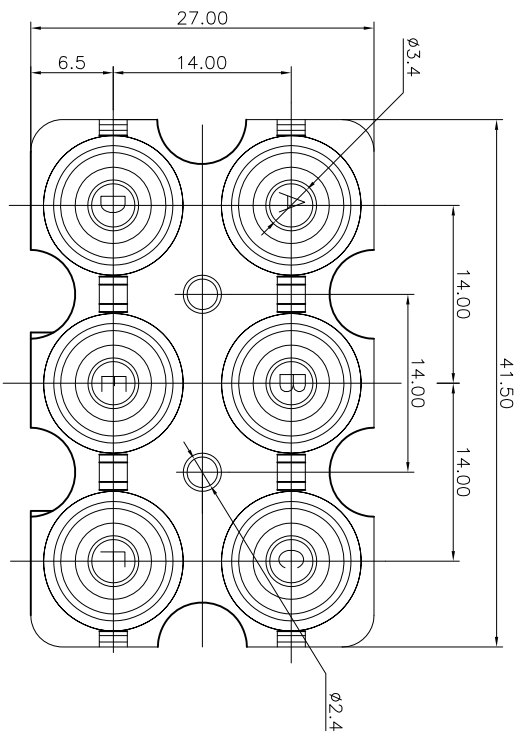
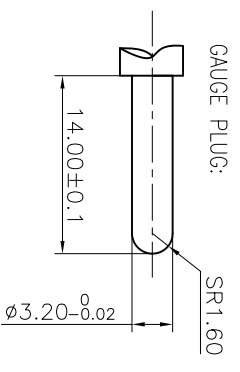


REV.	ECN NO.	MODIFIED MARK	APPROVED
A		FIRST RELEASE	

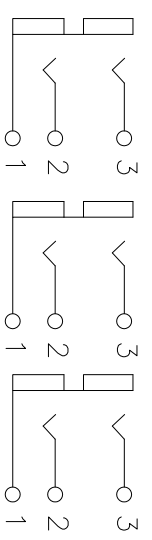

- NOTES:
- ELECTRICAL:
- 1: RATED CURRENT: 0.2A Max.
  - 2: RATED VOLTAGE: 50V AC.
  - 3: CONTACT RESISTANCE: 30 MILLIOHMS Max.
  - 4: INSULATION RESISTANCE: 100 MEGOHMS Min. AFTER TESTING: 100 MILLIOHMS Max.
  - 5: DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
- MECHANICAL:
- 1: INSERTION FORCE: 3N-30N.
  - 2: WITHDRAWAL FORCE: 3N-30N.
  - 3: DURABILITY: 100 CYCLES.
- ENVIRONMENTAL:
- TEMPERATURE RANGE: -20°C TO 60°C.

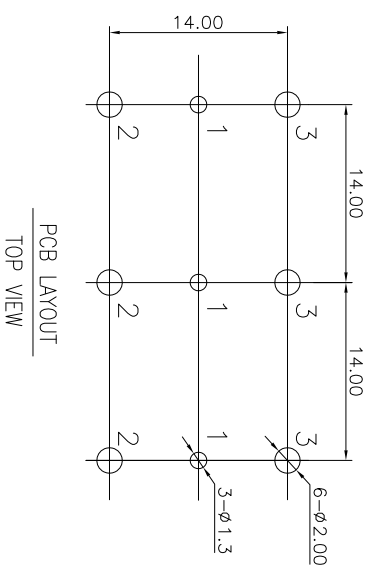

ANGLE	±5°	MODEL NAME: RCA-606C	 广东正宝科技有限公司 GUANGDONG TRENPPO TECHNOLOGY CO., LTD.
63 < L	±0.5	(PART NO.)	
16 < L ≤ 63	±0.4		
4 < L ≤ 16	±0.3	MAT'L:	
L ≤ 4	±0.2	FINISH:	
TOL TABLE:		See table	
THIS DOCUMENT IS THE PROPERTY OF		DESIGN: Z.F.Lion	TITLE: RCA PIN JACK
TRENPPO TECHNOLOGY CO., LTD. NO PART		CHECKED: L.W.Wu	DWG NO.:
HEREBY MAY BE REPRODUCED AND		APPROVED: X.Q.Hu	UNIT: mm
USED WITHOUT THE PRIOR WRITTEN		11/29'18	VIEW: 5:1
CONSENT OF THE OWNER		11/29'18	SCALE: SHEET: 1/1
			REV.: A
			SIZE: A3