
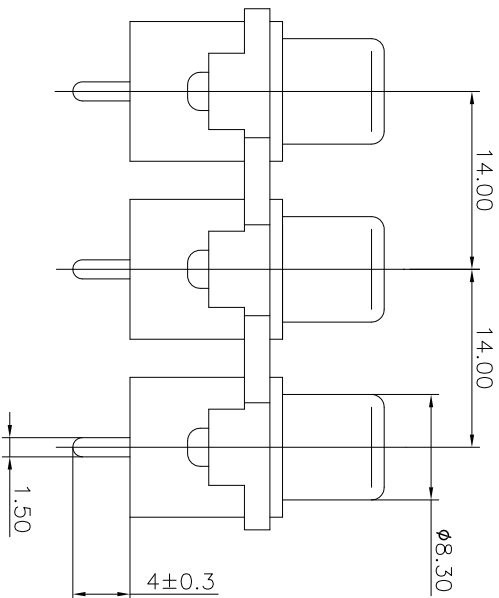
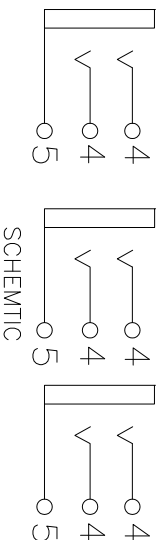
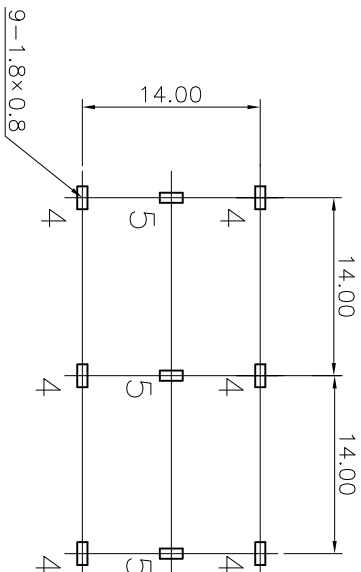
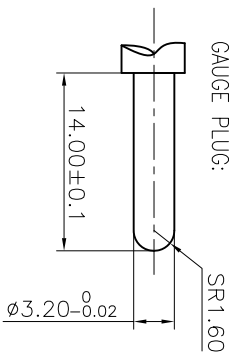
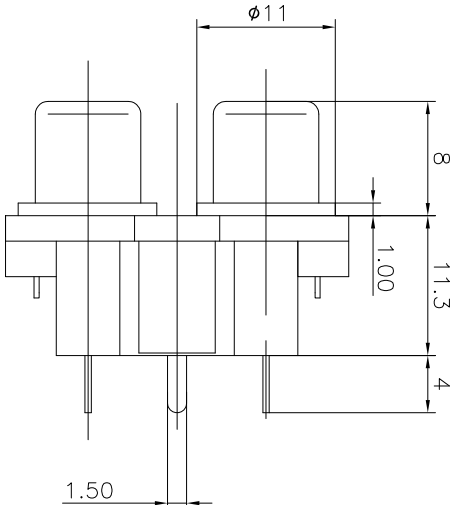


REV.	ECN NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	

NOTES:
ELECTRICAL:

- 1:RATED CURRENT: 0.2A Max.
2:RATED VOLTAGE: 50V AC.
3:CONTACT RESISTANCE: 30 MILLIOHMS Max.
AFTER TESTING:100 MILLIOHMS Max.
4:INSULATION RESISTANCE: 100 MEGAOHMS Min.
5:DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
MECHANICAL:
1:INSERTION FORCE: 3N-30N.
2:WITHDRAWAL FORCE: 3N-30N.
3:DURABILITY: 100 CYCLES.
ENVIRONMENTAL:
TEMPERATURE RANGE: -20°C TO 60°C.

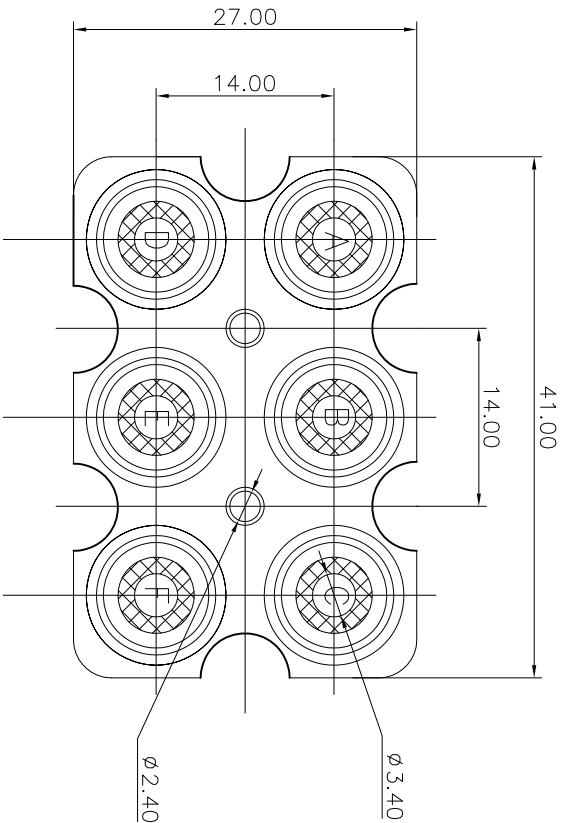

PCB LAYOUT
TOP VIEW

ANGLE	±5°	MODEL NAME: RCA-607D (PART NO.)	GUANGDONG TRENDPRO TECHNOLOGY CO. LTD.
63 < L	±0.5		
16 < L ≤ 63	±0.4		
4 < L ≤ 16	±0.3		
L ≤ 4	±0.2		
TOL TABLE:			
THIS DOCUMENT IS THE PROPERTY OF TRENDPRO TECHNOLOGY CO. LTD., NO PART HEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER			
FINISH:	See table	DESIGN: Z.F.Lian	11/29'18
CHECKED: L.W.Wu	11/29'18	TITLE: RCA PIN JACK	
APPROVED: X.Q.Hu	11/29'18	DWG NO.:	
Q'TY: /		UNIT: mm	
VIEW: 5:1		SCALE: SHEET: 1/1	
SIZE: A3		REV.: A	