
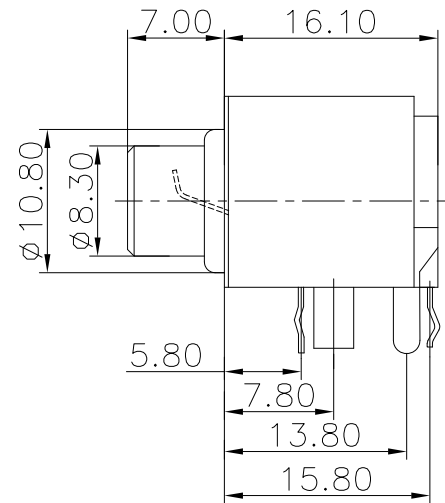


REV.	ECN NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	

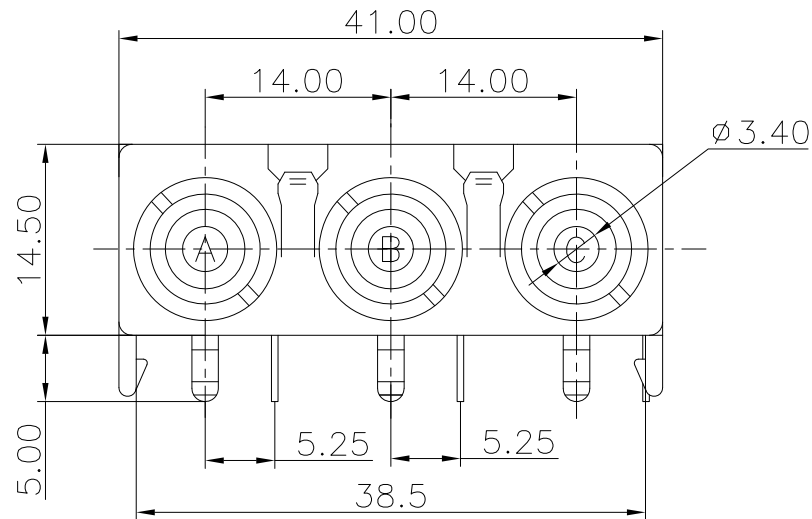

NOTES:

ELECTRICAL:

1:RATED CURRENT: 0.2A Max.

2:RATED VOLTAGE: 50V AC.

3:CONTACT RESISTANCE: 30 MILLIOHMS Max.

AFTER TESTING:100 MILLIOHMS Max.

4:INSULATION RESISTANCE: 100 MEGAOHMS Min.

5:DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.

MECHANICAL:


1:INSERTION FORCE: 3N-30N.

2:WITHDRAWAL FORCE: 3N-30N.


3:DURRABILITY: 100 CYCLES.

ENVIRONMENTAL:


TEMPERATURE RANGE: -20°C TO 60°C.

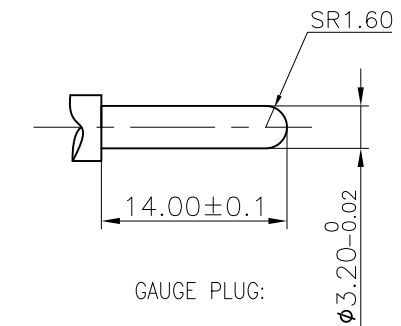

GAUGE PLUG:

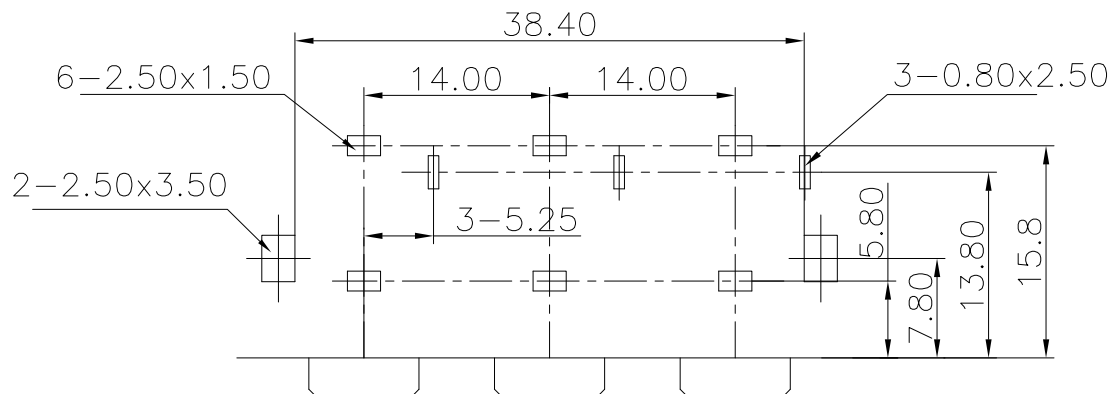

PCB LAYOUT
TOP VIEW



SCHEMATIC

ANGLE	±5°	MODEL NAME: RCA-304D/PD (PART NO.)		 广东正宝科技有限公司 GUANGDONG TRENPRO TECHNOLOGY CO. LTD.	
63 < L	±0.5				
16 < L ≤ 63	±0.4				
4 < L ≤ 16	±0.3				
L ≤ 4	±0.2				
TOL TABLE:		MAT'L:	DESIGN: Z.F.Lian 09/07'18	TITLE: RCA PIN JACK	
THIS DOCUMENT IS THE PROPERTY OF ZHENGWEI ELECTRONICS CO.,LTD.,NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER		See table	CHECKED: L.W.Wu 09/07'18	DWG NO.:	REV.: A
		FINISH:	APPROVED: X.Q.Hu 09/07'18	UNIT: mm	VIEW: 
		Q'TY: /		SCALE: 5:1	SHEET: 1/1
					SIZE: A3