
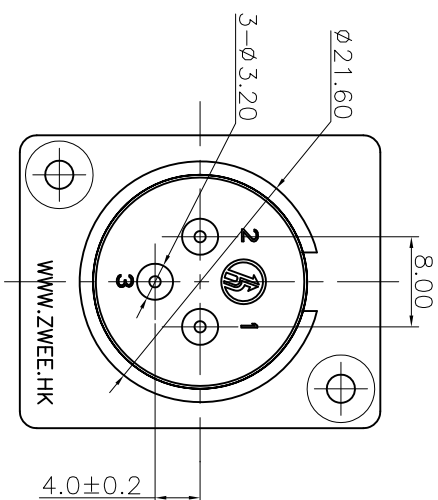
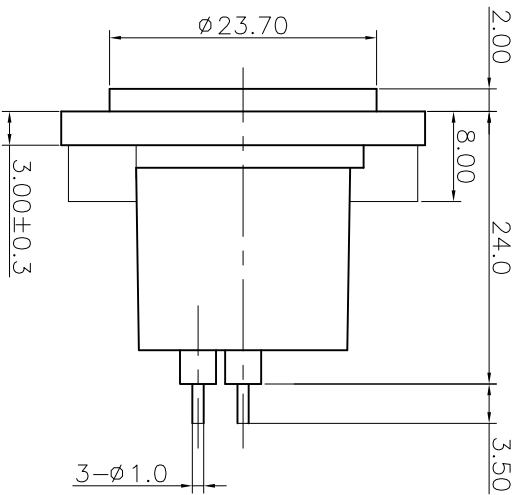


REV.	ECN NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	

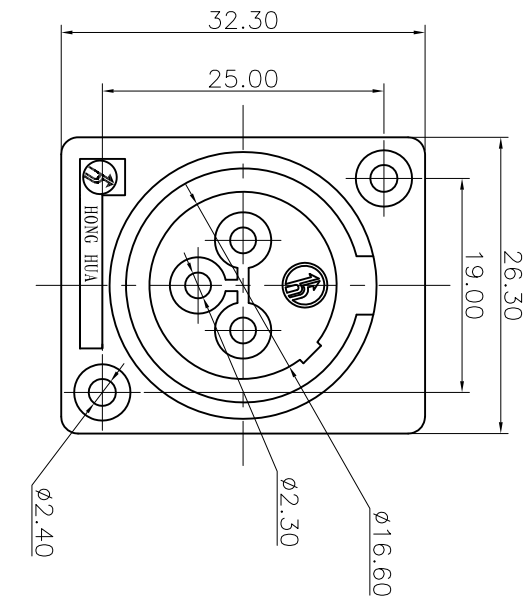



NOTES:

ELECTRICAL:

- 1: RATED CURRENT: 6A Max.
- 2: RATED VOLTAGE: 50V AC.
- 3: CONTACT RESISTANCE: 30 MILLIOHMS Max. AFTER TESTING: 60 MILLIOHMS Max.
- 4: INSULATION RESISTANCE: 1G OHMS Min.
- 5: DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.

MECHANICAL:

- 1: INSERTION FORCE: 5N-40N.
 - 2: WITHDRAWAL FORCE: 5N-40N.
 - 3: DURABILITY: 1000 CYCLES.
- ENVIRONMENTAL:
TEMPERATURE RANGE: -30°C TO 80°C.

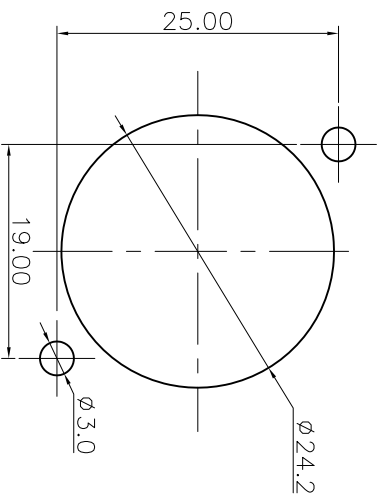

PCB LAYOUT
TOP VIEW

PANEL CUT OUT

ANGLE	±5°	MODEL NAME: SPM-01F (PART NO.)			广东正宝科技有限公司 GUANGDONG TRENPPO TECHNOLOGY CO. LTD.		
63 < L	±0.5						
16 < L ≤ 63	±0.4						
4 < L ≤ 16	±0.3						
L ≤ 4	±0.2	TITLE: XLR CABLE CONNECTORS					
TOL TABLE:		MAT'L: See table	DESIGN: X.H.Wong 08/28'18	DWG NO.:	REV.: A		
THIS DOCUMENT IS THE PROPERTY OF TRENPPO TECHNOLOGY CO., LTD. AND PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER		FINISH: See table	CHECKED: L.W.Wu 08/28'18				
QTY: /		APPROVED: X.Q.Hu 08/28'18	UNIT: mm	VIEW: 	SCALE: 5:1	SHEET: 1/1	
						SIZE: A3	