
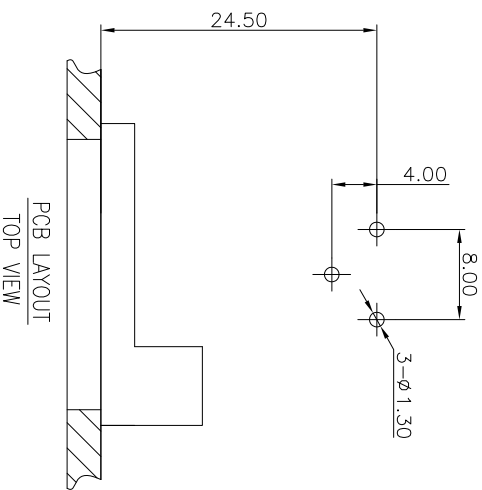
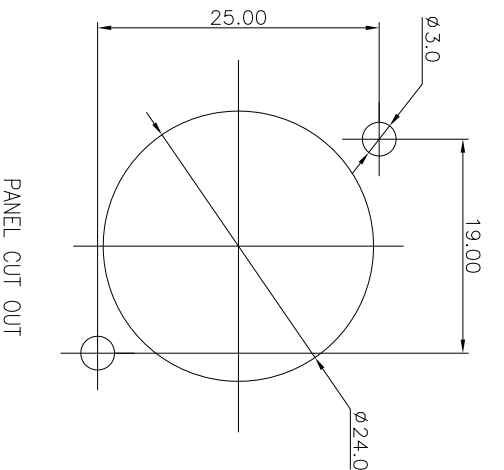
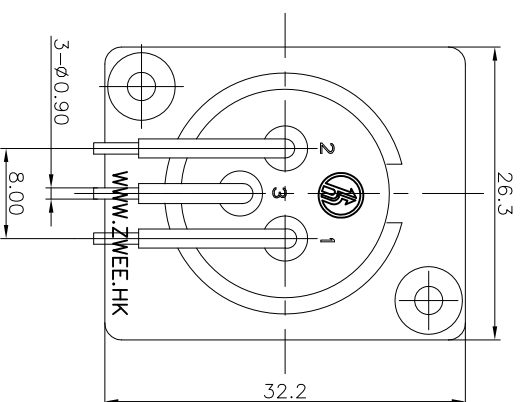
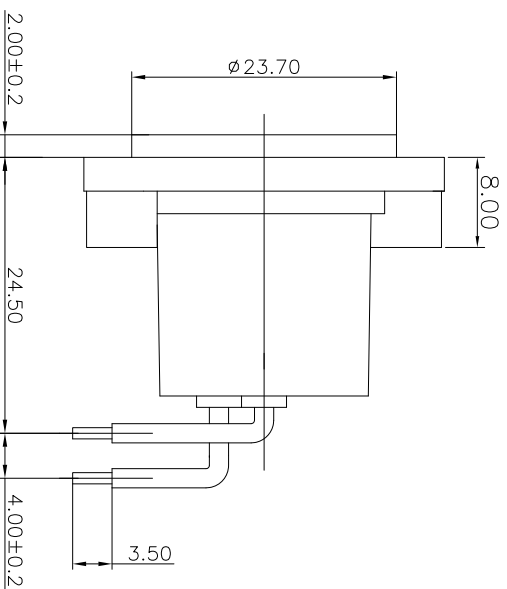


REV.	ECN NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	

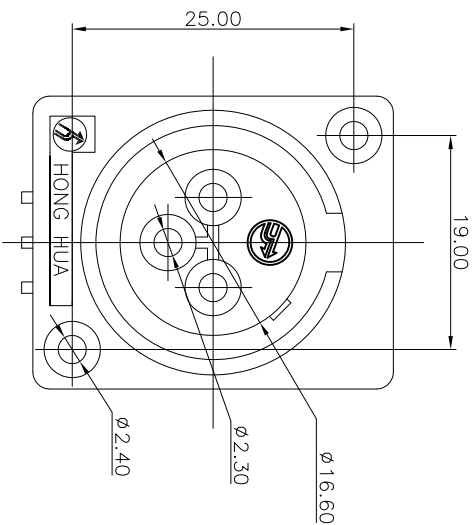

NOTES:
ELECTRICAL:
1:RATED CURRENT: 6A Max.
2:RATED VOLTAGE: 50V AC.
3:CONTACT RESISTANCE: 30 MILLIOHMS Max.
AFTER TESTING:60 MILLIOHMS Max.
4:INSULATION RESISTANCE: 1G OHMS Min.
5:DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
MECHANICAL:
1:INSERTION FORCE: 5N-40N.
2:WITHDRAWAL FORCE: 5N-40N.
3:DURABILITY: 1000 CYCLES.
ENVIRONMENTAL:
TEMPERATURE RANGE: -30°C TO 80°C.

ANGLE	±5°	MODEL NAME: SPM-02F (PART NO.)				广东正宝科技有限公司 GUANGDONG TRENPPO TECHNOLOGY CO., LTD.				
63 < L	±0.5									
16 < L ≤ 63	±0.4									
4 < L ≤ 16	±0.3									
L ≤ 4	±0.2	MAT'L:		DESIGN: X.H.Wang	08/28'18	TITLE: XLR CABLE CONNECTORS		REV.: A		
TOL TABLE:		See table		DWG NO.:						
THIS DOCUMENT IS THE PROPERTY OF TRENPPO TECHNOLOGY CO., LTD. AND PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER		FINISH: See table		CHECKED: L.W.Wu						
		Q'TY: /		APPROVED: X.Q.Hu	08/28'18	UNIT: mm	VIEW: 	SCALE: 5:1	SHEET: 1/1	SIZE: A3