



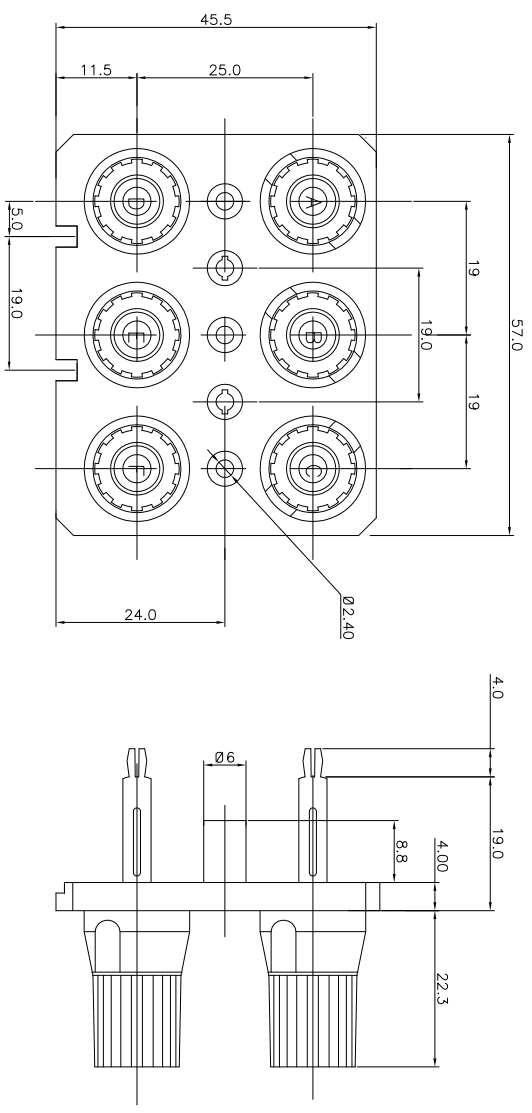

REV.	ECN NO.	MODIFIED MARK	APPROVED
A	---	FIRST RELEASE	

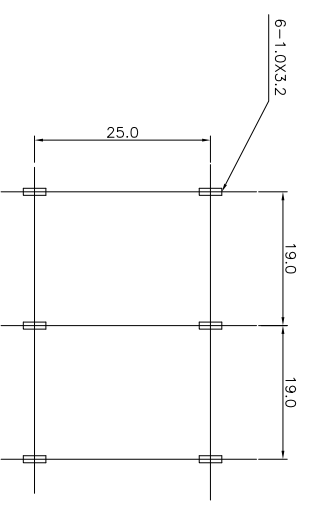

NOTES:
 ELECTRICAL:
 1:RATED CURRENT: 3A Max.
 2:RATED VOLTAGE: 50V AC.
 3:INSULATION RESISTANCE: 100 MEGAOHMS Min.
 4:DELECTRIC WITHSTANDING VOLTAGE: 1200 VAC Min.
 MECHANICAL:
 1:WIRE IN HOLD FORCE 5N (20#WIRE) MIN
 2:INSPECTED VOLTAGE, AT THE SPEED OF 6-10S PER MINUTES, THE SAMPLES ARE INSPECTED 10000 CYCLES, BUT THERE ARE NO DAMAGE ON THE PRESSURE AND THE RISING TEMPERATURE, ETC.3:APPLY 2kgf FORCE AT ANY DIRECTION , THERE NO LOOSE & NO CRACK

PCB LAYOUT
 TOP VIEW



ANGLE	±5°	MODEL NAME: WP6-11	 广东正宝科技有限公司 GUANGDONG TRENPRO TECHNOLOGY CO., LTD.
63 < L	±0.5	(PART NO.)	
16 < L ≤ 63	±0.4		
4 < L ≤ 16	±0.3	MAT'L:	DESIGN: X.H.Wang 11/06'18
L ≤ 4	±0.2	FINISH:	CHECKED: L.W.Wu 11/06'18
TOL TABLE:		See table	Q'TY: /
THIS DOCUMENT IS THE PROPERTY OF TRENPRO TECHNOLOGY CO., LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER		APPROVED: X.Q.Hu 11/06'18	UNIT: mm
			VIEW: 
			SCALE: 5:1
			SHEET: 1/1
			SIZE: A3
			REV.: A
			TITLE: WP PUSH TERMINAL