





REV.	ECN NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	

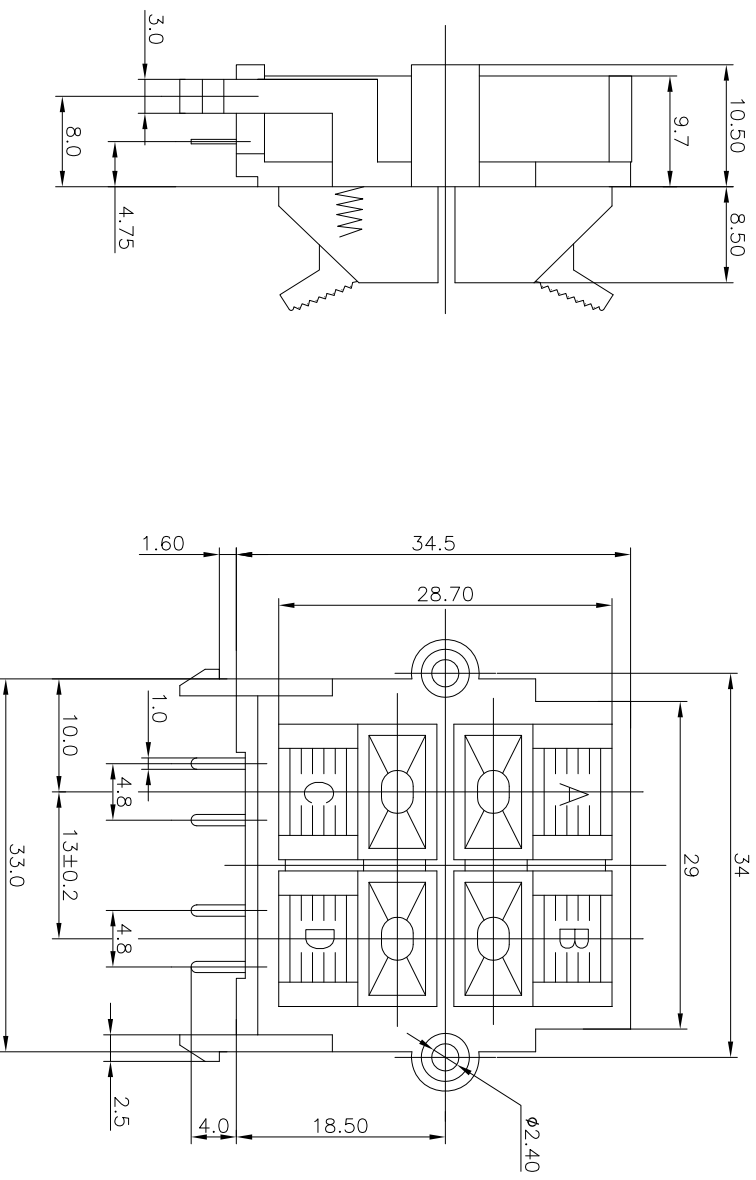

NOTES:  
 ELECTRICAL:  
 1:RATED CURRENT: 3A Max.  
 2:RATED VOLTAGE: 50V AC.  
 3:INSULATION RESISTANCE: 100 MEGAOHMS Min.  
 4:DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC Min.  
 MECHANICAL:  
 1:WIRE IN HOLD FORCE 5N (20#WIRE) MIN  
 2:INSPECTED VOLTAGE, AT THE SPEED OF 6-10S PER MINUTES, THE SAMPLES ARE INSPECTED 10000 CYCLES, BUT THERE ARE NO DAMAGE ON THE PRESSURE AND THE RISING TEMPERATURE, ETC.3.APPLY 2kgf FORCE AT ANY DIRECTION , THERE NO LOOSE & NO CRACK

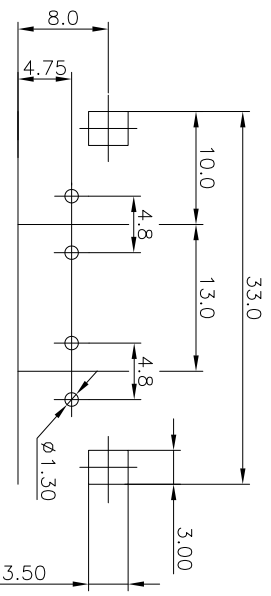

PCB LAYOUT  
TOP VIEW

ANGLE	±5°	MODEL NAME: WP4-15FB (PART NO.)	 广东正宝科技有限公司 GUANGDONG TERAPRO TECHNOLOGY CO., LTD.	TITLE: WP PUSH TERMINAL	REV.: A
63 < L	±0.5	MAT'L: See table		CHECKED: L.W.Wu 09/13'18	DWG NO.:
16 < L ≤ 63	±0.4	FINISH: See table	DESIGN: X.H.Wang 09/13'18	QTY: /	APPROVED: X.Q.Hu 09/13'18
4 < L ≤ 16	±0.3			UNIT: mm	VIEW: 
L ≤ 4	±0.2			SCALE: 5:1	SHEET: 1/1
TOL TABLE:					SIZE: A3
THIS DOCUMENT IS THE PROPERTY OF TERAPRO TECHNOLOGY CO., LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER					