
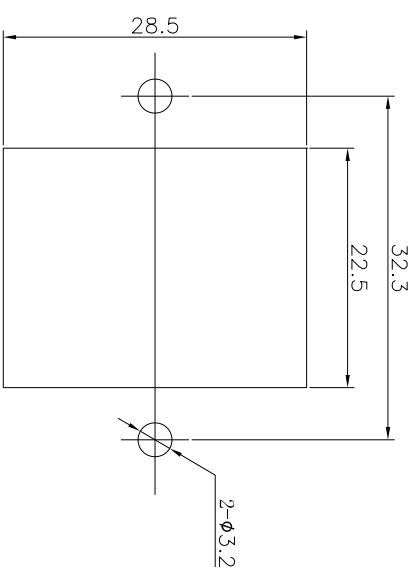
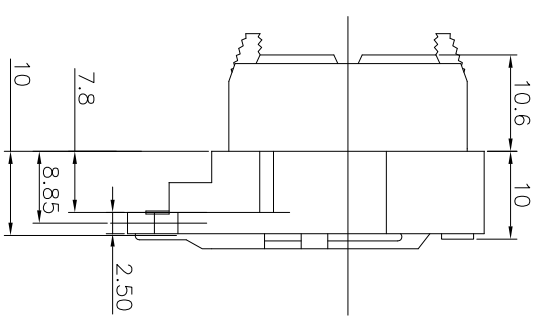



REV.	ECN NO.	MODIFIED MARK	APPROVED
A		FIRST RELEASE	

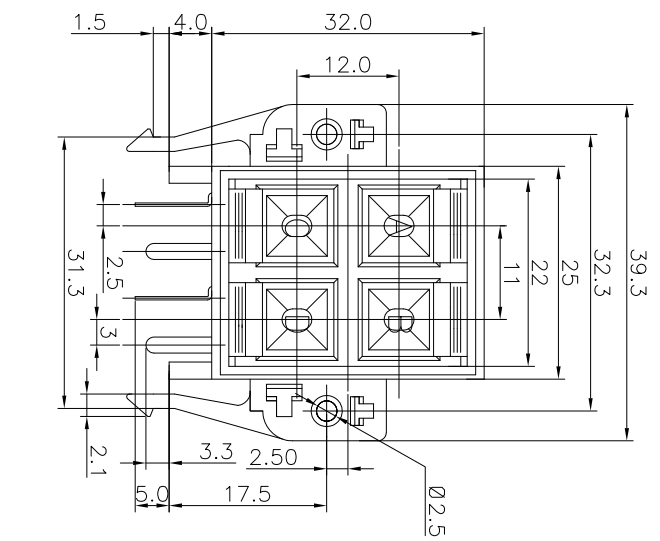

PANEL CUT OUT

NOTES:  
 ELECTRICAL:  
 1:RATED CURRENT: 3A Max.  
 2:RATED VOLTAGE: 50V AC.  
 3:INSULATION RESISTANCE: 100 MEGAOHMS Min.  
 4:DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC Min.  
 MECHANICAL:  
 1:WIRE IN HOLD FORCE 5N (20#WIRE) MIN  
 2:INSPECTED VOLTAGE, AT THE SPEED OF 6-10S PER MINUTES, THE SAMPLES ARE INSPECTED 10000 CYCLES, BUT THERE ARE NO DAMAGE ON THE PRESSURE AND THE RISING TEMPERATURE, ETC.3:APPLY 2kgf FORCE AT ANY DIRECTION , THERE NO LOOSE & NO CRACK

PCB LAYOUT  
 TOP VIEW

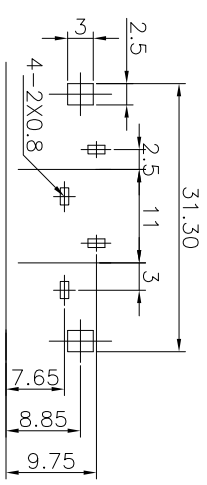

ANGLE	±5°
63 < L	±0.5
16 < L ≤ 63	±0.4
4 < L ≤ 16	±0.3
L ≤ 4	±0.2

TOL TABLE:  
 THIS DOCUMENT IS THE PROPERTY OF  
 TERPRO TECHNOLOGY CO., LTD.,NO PART  
 THEREOF MAY BE REPRODUCED AND  
 USED WITHOUT THE PRIOR WRITTEN  
 CONSENT OF THE OWNER

MODEL NAME: WP4-17B (PART NO.)	DESIGN: X.H.Wang 11/06'18	TITLE: WP PUSH TERMINAL	REV.: A
MAT'L: See table	CHECKED: L.W.Wu 11/06'18	DWG NO.:	
FINISH: See table	APPROVED: X.Q.Hu 11/06'18	UNIT: mm	VIEW: 5:1
Q'TY: /		SCALE: SHEET: 1/1	SIZE: A3

广东正宝科技有限公司  
 GUANGDONG TERPRO TECHNOLOGY CO., LTD.