



REV.	ECN NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	

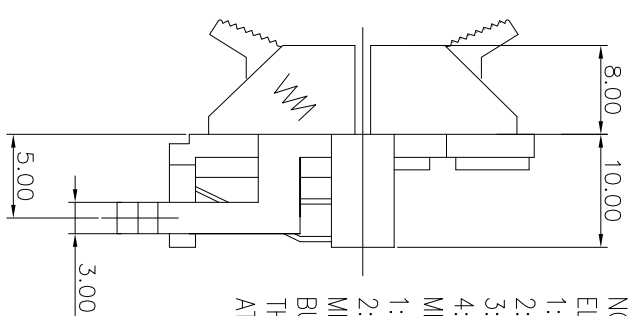


NOTES:

ELECTRICAL:

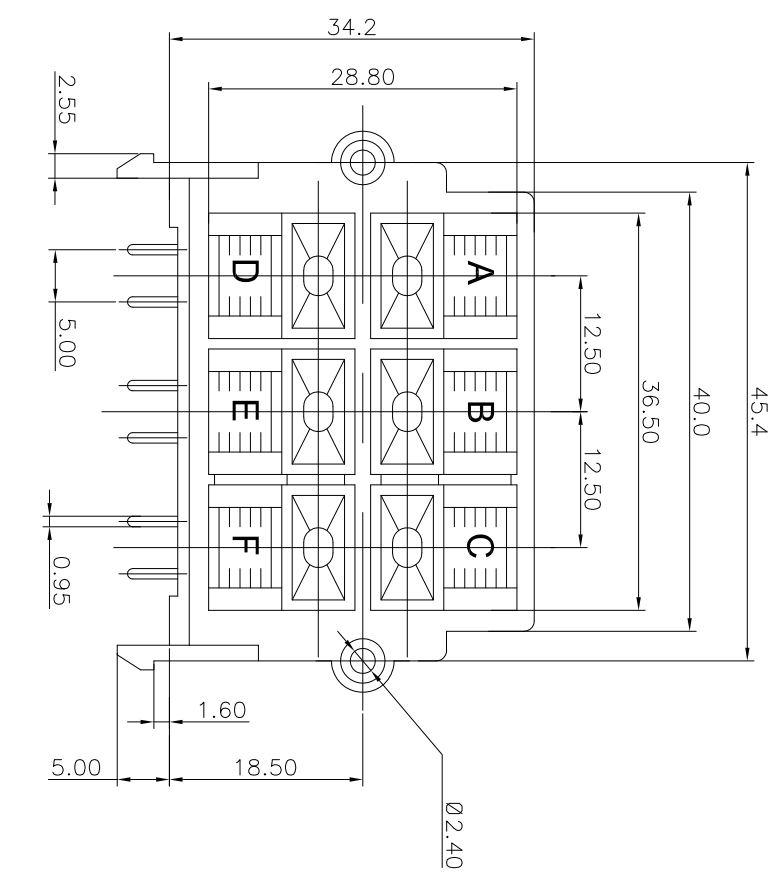

- 1:RATED CURRENT: 3A Max.
- 2:RATED VOLTAGE: 50V AC.
- 3:INSULATION RESISTANCE: 100 MEGAOHMS Min.
- 4:DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC Min.

MECHANICAL:

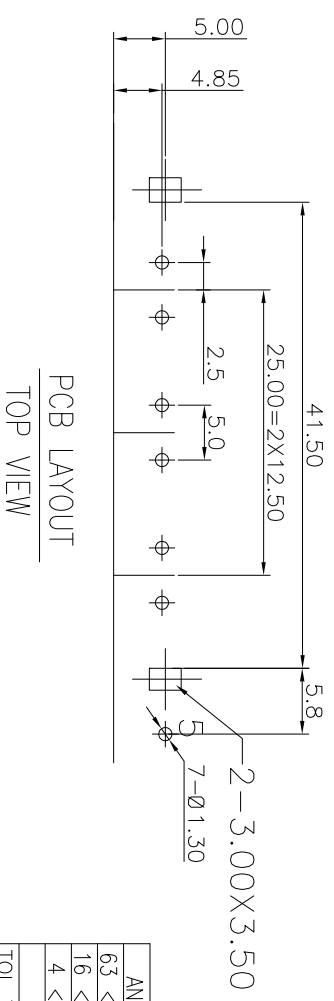- 1:WIRE IN HOLD FORCE 5N (20#WIRE) MIN
- 2:INSPECTED VOLTAGE, AT THE SPEED OF 6-10S PER MINUTES, THE SAMPLES ARE INSPECTED 10000 CYCLES, BUT THERE ARE NO DAMAGE ON THE PRESSURE AND THE RISING TEMPERATURE, ETC.
- 3:APPLY 2kgf FORCE AT ANY DIRECTION, THERE NO LOOSE & NO CRACK



PCB LAYOUT
TOP VIEW

ANGLE	±5°	MODEL NAME: WP6-5	 广东正宝科技有限公司 GUANGDONG TRENPRO TECHNOLOGY CO. LTD.	TITLE: WP PUSH TERMINAL	REV.: A
63 < L	±0.5	(PART NO.)		DWG NO.:	SIZE: A3
16 < L ≤ 63	±0.4				
4 < L ≤ 16	±0.3				
L ≤ 4	±0.2				
TOL TABLE:		MAT'L: See table			
THIS DOCUMENT IS THE PROPERTY OF TRENPRO TECHNOLOGY CO., LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER		FINISH: See table			
		Q'TY: /	DESIGN: X.H.Wang 11/06'18	APPROVED: X.Q.Hu 11/06'18	UNIT: mm
			CHECKED: L.W.Wu 11/06'18		VIEW: 
					SCALE: 5:1
					SHEET: 1/1